

Photo Printing Solutions



P95DE

Medical B/W Printer

The most decisive printer

Compact size, outstanding print quality and exceptionally fast printing - the P95DE digital printer, the successor to the P93DW, has all the qualities of a top-class system printer, making it ideal for use in medical applications. The new thermal head and optimised heating process guarantee pinsharp printouts and clearly defined images. Printing is 50% faster than with its predecessor, and the 1280 x 5760 pixel resolution allows exceptional long format to be printed on the new high-gloss paper. It's economical too: thanks to a reduction in the amount of white space between images, the P95DE gives you 12% more printouts per roll.


Main features

- // High resolution 325 dpi
- // 1.9secs print speed (1280 x 960)
- // Optimised Print control Engine
- // Long print format (100x450mm)
- // Compact design and dimensions
- // New high/gloss thermal paper

Features



Easy to use



Compact Size



High Resolution

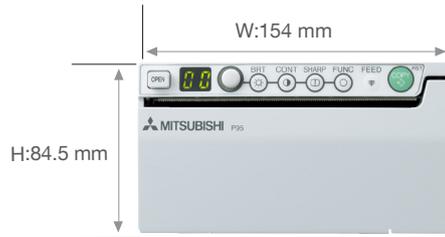

 Printing
time


Print size

P95DE



FRONT PANEL



- 1 OPEN button
- 2 LED display
- 3 Rotary Knob
- 4 BRT button
- 5 CONT button

- 6 SHARP button
- 7 FUNC button
- 8 FEED button
- 9 COPY button
- 10 Print exit/cutter

REAR PANEL



- 11 Equipotential terminal
- 12 USB terminal
- 13 Power supply (AC LINE)
- 14 Power switch

Technical specifications

Model	P95DE
Print method	Thermal sensitive
Resolution	Printhead 325 dpi (12.8 dots/mm), up to 1280x5760
Color depth	256 greyscales
Print speed/Picture (without data transfer)	1.9 secs (100x75mm)
Print size	Thermal paper roll, 110mm wide
Print Area	100x75mm (standard) / 100x450mm (max.)
Paper capacity	220-245 prints and 18-20m long approx. Depending on paper reference
Printer memory	1 frame (8Mb), repeat print with COPY button
Interface	USB 2.0 (High Speed)
Printer driver	Microsoft Windows 2000, XP, 7/ 8 / 10 (32/64 bit) and MacOSX
Power supply	AC 100-120V, 50/60 Hz AC 220-240V, 50/60Hz
Power consumption max.	1.5-0.8A (printing / 100-240V)approx. 115W during printing, approx. 10W in stand-by
Dimensions (WxHxD)	approx. 154 x 84.5 x 239 mm
Weight	approx. 2.6kg
Approvals	TÜV-GS/GM, CE (LVD, EMC, MDD), UL, CAN/CSA
Consumables	KP61B-CE, KP65HM-CE, KP91HG-CE, K95HG, KP63HM

Specifications are subject to change without notice.